

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

PCT/ SE 00 / 0 1 9 3 3

2500/1933

REC'D 05 DEC 2000

PO

PCT

Intyg Certificate

4

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande Smarteq Wireless AB, Enebyberg SE
Applicant (s)

(21) Patentansökningsnummer 9903573-5
Patent application number

(86) Ingivningsdatum 1999-10-04
Date of filing

Stockholm, 2000-11-29

För Patent- och registreringsverket
For the Patent- and Registration Office


Therese Friberger

Avgift
Fee

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

PATENT- OCH
REGISTRERINGSVERKET
SWEDEN

Postadress/Adress
Box 5055
S-102 42 STOCKHOLM

Telefon/Phone
+46 8 782 25 00
Vx 08-782 25 00

Telex
17978
PATOREG S

Telefax
+46 8 666 02 86
08-666 02 86

+46 8 6609115

Ink. t. Patent- och reg.verket

1

1999-10-04

ANTENNA MEANS

Huvudfaxen Kassar

FIELD OF THE INVENTION

The present invention relates to an antenna means in general and specifically to an antenna means for transceiving RF signals in at least a first frequency band.

DESCRIPTION OF THE RELATED ART

With the recent rapid progress of electronic communication technique, communication apparatuses having a higher function and smaller size have been developed and utilised for various kinds of mobile communication apparatuses.

Antenna means transmitting and receiving (transceiving) RF-signals on a single or dual frequency band are well known for a long time. Antennas according to the state of the art including single band antennas demands generally a quite large amount of space, which make them unpractical for use where there is a need for small and efficient antenna means.

A quarter wave monopole 1A shown in figure 1a has a wide spread use due to its simplicity and good match for single band application where its height (generally written $\lambda/4$ which is 80-90 mm for 800-900 MHz) is acceptable. It is for car applications generally made of a metallic pin inside some more or less fancy designed plastic tube. A bigger diameter (or wider strip if made as a circuit board) will increase the bandwidth and external matching components can be used for the same purpose. The quarter wave monopole needs a ground plane which here is understood a rather big area of conducting material (having a diameter of one or more λ at the operating frequency of the antenna) which is a problem.

A so called L antenna 1B is shown in fig 1b. The main radiation in such a structure comes from the vertical part with respective

-10- 0 4

Huvudfaxen Kassar

2

to a ground plane means 20 which by itself can be said to be a short monopole. The horizontal part is not radiating in proportion to its length but is rather a top loading to the vertical part. The top loading makes the radiating resistance up to 4 times higher than the monopole alone a fact which increases the bandwidth. Depending on the height of the vertical part the bandwidth can be sufficient for single band telephony in spite of a height in the order of $\lambda/8$. The band width will typically increase to the second or third power as a function of the height. Still multiband service is difficult to achieve and one obvious reason is that the total length is typically $\lambda/4$ which indicates drastically different matching conditions at twice the frequency when the height corresponds to $\lambda/2$ which is a problem.

The United States Patent US 5 629 712 discloses a vehicular radio reception antenna which is concealed within a body trim piece. Said antenna comprising a metal ground plane and a conducting loop connected to the ground plane at its first and second ends. Said loop circumscribes a slot area between the ground plane and the conducting loop. The length of the slot is selected to be $\lambda/2$ wavelength in the desired frequency band to be received by the antenna.

Since this kind of antenna is adapted to receive FM and/or AM signals said $\lambda/2$ wavelength of the slot corresponds to about 1.5 meters which is a problem when the cubic capacity is scarce. Another problem is that said antenna is dependent on the shape of the car. Yet another problem is that said antenna requires external components such as capacitors or inductors for power compensation and frequency matching. Still another problem is that said antenna does not exhibit an omnidirectional radiating pattern.

+46 8 6609115

Ink. i Patent- och reg.verket

-10- 0 4

3

Huvudfaxen Kossan

SUMMARY OF THE INVENTION

It is an object of the present invention to provide an antenna means which overcomes or at least reduces the above mentioned problems.

- 5 According to the present invention there is provided an antenna means as claimed in claim 1.

One advantage with the present invention is that the feeding of the antenna means is very simple.

- 10 Another advantage with the present invention is that the antenna is relatively simple to manufacture.

A further advantage with the present invention is that the antenna shows a good omnidirectional radiating pattern.

- 15 Yet another advantage with the invention is that due to its flexibility it can operate in at least one frequency band i.e. dual or multiple bands.

Yet another advantage is that with the radiating structure according to at least one of the embodiments of the invention it is relatively easy to alter for dual/multiple band operation with tuning/matching means.

- 20 Yet another advantage with the present invention is that the different parts of the antenna can easily be stored before assembling said antenna.

Yet another advantage with the present invention is that the antenna layout is relatively easy to alter.

- 25 Yet another advantage with the present invention is that single band performance is very good within a low height and multiband performance is good within the same height.

The invention will now be described in more detail with reference to preferred embodiments thereof and also with reference to the accompanying drawings.

5 **BRIEF DESCRIPTION OF THE DRAWINGS**

Figure 1a shows a development stage of an antenna device according to the state of the art.

10 Fig 1b shows a further development stage of an antenna device according to the state of the art.

Figure 2 shows a first embodiment of an antenna device according to the invention arranged on a ground plane means.

15

Figure 3 shows a second embodiment of an antenna device according to the invention arranged on a ground plane means.

20

Figure 4 shows a third embodiment of an antenna device according to the invention arranged on a ground plane means.

Figure 5 shows a fourth embodiment of an antenna device according to the invention arranged on a ground plane means.

25

Figure 6 shows a fifth embodiment of an antenna device according to the invention arranged on a ground plane means.

DESCRIPTION OF PREFERRED EMBODIMENTS

30

In this disclosure it is to be understood that the antenna system of the invention is operable to receive and/or transmit (transceive) radio signals. Even if a term is used herein that suggests one specific signal direction it is to be appreciated that such a situation can cover that signal direction and/or its reverse.

35

1999-10- 0 4

Huvudfoxen Kasson

Fig. 1a and 1b is described in connection with the prior art above.

- 5 With reference to Figure 2, a first embodiment of an antenna device 1 according to the invention is shown. The antenna device is arranged for transmission/reception of RF waves in at least one frequency band, e.g. in the 900 MHz band.
- 10 The antenna device 1 is to be connected to a radio communication device (not shown) arranged to a vehicle. As shown in the figures, the antenna device 1 is arranged on a ground plane means 20, such as a vehicle body. This ground plane means 20 will act as a ground plane. The ground plane
- 15 means 20 can be replaced by a conductive ground plane of proper size in a radio communication device, e.g. a PCB (printed circuit board).

- The antenna device 1 comprises a conductive radiating structure
- 20 10 for transmission/reception of RF waves in said frequency band(s).

- The conductive radiating structure 10, being in this embodiment essentially rectangular shaped, comprises a first end 12, a
- 25 second end 14, a tuning/matching means 16 and an bridge connector 18. A second elongated open loop (or internal elongated open loop) in said structure 10 is defined by the path from the first end to the second end via the bridge connector 18. A first elongated open loop (or an external
- 30 elongated open loop) is defined as a longest path from the first end to the second end in the conductive radiating structure 10. In Fig. 2 the tuning/matching means 16 is with a first side capacitively and inductively coupled to a second side of the bridge connector 18 and partly with a second side
- 35 capacitively and inductively coupled to a common side of the

+46 8 6609115

Ink. t. Patent- reg.verket

1999-10-04

6

Huvudfaxen Kassar

rectangular shaped first and second elongated open loops located closest to the ground plane. Said bridge connector 18 having a first side capacitively and inductively coupled to a side of the first rectangular shaped elongated open loop

5 located furthest away from the ground plane. The opening 17 of the first and second elongated open loop structures is in this embodiment located at a corner of the rectangle between the tuning/matching means 16 and the ground plane means 20. However, the opening 17 can be arranged somewhere along the

10 common side of the first and second elongated open loops.

Due to the frequency dependence of the inductive coupling the second elongated open loop has a small influence to the lower frequency band but much higher to the higher frequency band.

15 Thus a more efficient optimization is possible for two or multiband service.

The conductive radiating structure formed as an elongated open loop 10 is to be connected to a transmission/feed, for example

20 a coaxial cable 19, at its second end 14, being in this embodiment a feed portion 15. The feed line is connected to transceiver circuits of a radio communication device.

The first end 12 of conductive radiating structure 10 is

25 connected to ground. The distance between the first end 12 and the second end 14 along the second elongated open conductive radiating structure is in the range of $\lambda/4$ - λ , where λ is the wavelength of the desired frequency in the frequency band to be received/transmitted by the antenna. The first elongated open

30 loop can be tuned to its desired frequency by adjusting said distance between the first and second ends 12, 14, by cutting at the second end 14 of the conductive radiating structure 10. The distance between the first end 12 and the second end 14 along the first elongated open loop is dependent on the choice

35 of frequency band. If the second elongated loop is adjusted to

+46 8 6609115

Ink. t. Patent- och reg.verket

99-10- 0 4

7

Huvudfoxen Kassan

operate at a frequency at 1800 MHz and the first elongated loop is adjusted to receive a frequency at 900 MHz the relation between the distance between the first 12 and second ends of the first and second elongated loop is about 2:1.

5

The conductive radiating structure 10 is arranged on a ground plane means 20. The first end of the radiating structure is preferably capacitively connected to ground but can alternatively be galvanically connected to ground. If galvanically connected to ground said first end of the radiating structure can be provided with connection pins passing through holes in the ground plane means 20 acting as a ground plane or through holes in a metallic sheet acting as a ground plane. The pins are then preferably soldered to the ground plane means 20 or the metallic sheet.

15

The ground plane means 20 with a conductive portion of a proper size is sufficient for the antenna function, and the antenna device 1 can be mounted to a vehicle. However, if the antenna device 1 is mounted at a small height e.g. 0.5 mm above a vehicle roof or body, conductive portions of the vehicle are coupled, preferably capacitively, to the ground plane means 20. In this case said conductive portions also act as ground plane. However, the radiation of the antenna is dependent on the size of the ground plane.

20

25

The conductive radiating structure 10 is shown to be arranged orthogonal to the ground plane means 20. As mentioned above the first end of the conductive radiating structure is galvanically or capacitively coupled to the ground plane means 20. The second end of the conductive radiating structure is electrically isolated from the ground plane means 20. A transmission/feed line e.g. a coaxial cable 19 is with its electrical shielding connected to ground or directly to the first end of the radiating structure. A central conductor in

30

35

+46 8 6609115

Ink. t. Patent- och reg.verket

1999-10-04

8

Huvudfoxen Kassan

the coaxial cable 19 is connected to the second end of the conductive radiating structure.

5 The conductive radiating structure 10 is preferably
manufactured by stamping or cutting out the structure from a
conductive plate e.g. metal plate. The width of the first and
second elongated open loops in the conductive radiating
structure 10 in the plane of the radiating structure is
essentially larger than the thickness perpendicular to the
10 plane of the structure. Said radiating structure can be
arranged to a dielectric substrate by means of rivets, screws,
glue, tape or other equivalent means. Alternatively, said
radiating structure could be made out of a electrical conductor
having for example a round, rectangular or triangular cross
15 section. The structure could in a further alternative be formed
on a dielectric carrier by printing or etching.

A surface defined by the conductive radiating structure is
preferably orthogonal to the ground plane. However, said
20 surface of the structure can be arranged at an angle α with
respect to said ground plane, where said angle α is in the
range of 30-150°. Said surface of the structure is preferably
plane but can be curved or folded in a C-shaped or V-shaped
manner respectively.

25

The direction of polarisation is orthogonal to the ground
plane. The loop structure 10 radiates the desired frequency in
a omnidirectional pattern.

30

With reference to Figure 3, a second embodiment of an antenna
device 1 according to the invention is shown. The antenna
device is arranged for transmission/reception of RF waves in at
least one frequency band, e.g. in the 900 MHz band.

The antenna device 1 is to be connected to a radio communication device (not shown) arranged to a vehicle. As shown in figure 3, the antenna device 1 is arranged on a ground plane means 20. The ground plane means 20 could be a conductive ground plane of proper size in a radio communication device, e.g. a PCB (printed circuit board).

The antenna device 1 comprises a conductive radiating structure formed as an elongated open loop 10 for transmission/reception of RF waves in said frequency band(s).

The conductive radiating structure formed as an elongated open loop 10, being in this embodiment essentially rectangular shaped, comprises a first end 12 and a second end 14. Said conductive radiating structure formed as an elongated open loop further comprises tuning/matching means 16, 17. Said tuning/matching means being elements for tuning the radiating structure to the desired operating frequencies by the antenna. In this embodiment the tuning/matching means 16 is with a first side capacitively and inductively coupled to a side of the rectangular shaped elongated open loop structure being located furthest away from the ground plane means 20 and partly with a second side to a open portion (17) of said elongated open loop structure being located closest to the ground plane means 20.

The conductive radiating structure formed as an elongated open loop 10 is to be connected to a transmission/feed, for example a coaxial cable 19, at its second end 14 being in this embodiment a feed portion 15. The feed line is connected to transceiver circuits of a radio communication device.

The first end 12 of the conductive radiating structure formed as an elongated open loop 10 is connected to ground. The distance between the first end 12 and the second end 14 along the conductive radiating structure formed as an elongated open

+46 8 6609115

Ink. t. Pa. ch reg.verket

10

1999-10- 0 4

Huvudfoxen Kassan

loop is in the range of $\lambda/4-\lambda$, where λ is the wavelength of the desired frequency in the frequency band to be received/transmitted by the antenna. The conductive radiating structure formed as an elongated open loop 10 can be tuned to its frequency by adjusting said distance between its the first and second ends 12, 14, by cutting at the second end 14 of the conductive radiating structure formed as an elongated open loop 10.

10 The conductive radiating structure formed as an elongated open loop 10 is arranged on a ground plane means 20. The first end 12 of the conductive radiating structure formed as an elongated open loop 10 is preferably capacitively connected to ground but can alternatively be galvanically connected to ground. If 15 galvanically connected to ground said first end of the conductive radiating structure formed as an elongated open loop can be provided with connection pins passing through holes in the ground plane means 20 acting as a ground plane or through holes in a metallic sheet acting as a ground plane. The pins 20 are then preferably soldered to the ground plane means 20 or the metallic sheet.

The ground plane means 20 with a conductive portion of a proper size is sufficient for the antenna function, and the antenna 25 device 1 can be mounted to a vehicle. However, if the antenna device 1 is mounted at a small height e.g. 0.5 mm above a vehicle roof or body, conductive portions of the vehicle are coupled, preferably capacitively, to the ground plane means 20. In this case said conductive portions also act as ground plane. 30 However, the radiation of the antenna is dependent on the size of the ground plane.

The conductive radiating structure formed as an elongated open loop 10 is shown to be arranged orthogonal to the ground plane means 20. As mentioned above the first end of the conductive 35

nk. t. Patent- och reg.verket

11

1399 -10- 0 4

Huvudfaxen Kassar

radiating structure formed as an elongated open loop is
capacitively or galvanically coupled to the ground plane means
20. The second end of the conductive radiating structure formed
as an elongated open loop is electrically isolated from the
5 ground plane means 20, i.e. ground. A transmission/feed line
e.g. a coaxial cable 19 is with its electrical shielding
connected to ground or directly to the first end of the
conductive radiating structure formed as an elongated open
loop. A central conductor in the coaxial cable 19 is connected
10 to the second end of the conductive radiating structure formed
as an elongated open loop.

The conductive radiating structure formed as an elongated open
loop 10 is preferably manufactured by stamping or cutting out
15 the structure from a conductive plate e.g. metal plate, i.e.
manufactured in one piece. The width of the conductive
radiating structure formed as an elongated open loop in the
plane of the radiating structure is essentially larger than the
thickness perpendicular to the plane of the structure. Said
20 radiating structure can be arranged to a dielectric substrate
by means of rivets, glue, screws, tape or other equivalent
means.

A surface defined by the conductive radiating structure 10
25 formed as an elongated open loop is preferably orthogonal to
the ground plane. However, said surface of the conductive
radiating structure formed as an elongated open loop can be
arranged at an angle α with respect to said ground plane,
where said angle α is in the range of 30-150°. Said surface of
30 the conductive radiating structure formed as an elongated open
loop is preferably a plane surface but can be curved or folded
in a C-shaped or V-shaped manner respectively.

The direction of polarisation is orthogonal to the ground
35 plane. The conductive radiating structure formed as an

+46 8 6609115

Ink. t. Pat. och reg.verket

1999-10- 0 4

12

Huvudfoxen Kassar

elongated open loop 10 radiates the desired frequency in a omnidirectional pattern.

5 With reference to Figure 4, a third embodiment of an antenna device 1 according to the invention is shown. The antenna device is arranged for transmission/reception of RF waves in at least one frequency band, e.g. in the 900 MHz band.

10 The antenna device 1 is to be connected to a radio communication device (not shown) arranged to a vehicle. As shown in the figure, the antenna device 1 is arranged on a ground plane means 20, such as a vehicle body. This ground plane means 20 will act as a ground plane. The ground plane means 20 can be replaced by a conductive ground plane of proper
15 size in a radio communication device, e.g. a PCB (printed circuit board). The radiation from the antenna device is dependent on the size of the ground plane.

20 The antenna device 1 comprises a conductive radiating structure 10 formed as an elongated open loop (EOLA) for transmission/reception of RF waves in said frequency band(s).

25 The conductive radiating structure 10, being in this embodiment essentially meander shaped, comprises a first end 12 and a second end 14. The conductive radiating structure can be seen as derived from an L antenna with a second vertical part added and also a horizontal bottom part. The last horizontal part is radiating very little due to its position close to the ground plane. Its important mission however is to be a kind of low
30 reactive impedance load (as compared to an open end) to the second vertical part in order to enable a second vertical current. Furthermore it is possible to chose parameters to give said reactive impedance a size appropriate for adjusting the phase of said current so that the current in the two vertical

99-10- 0 4

13

Huvudfoxen Kassan

parts are co-operating in order to increase bandwidth and make the radiation omnidirectional.

5 In some applications (like a car or a boat with a plastic roof) a very small ground plane can be used and the flexibility of the radiating structure formed as an elongated open loop allows the tuning of the antenna to the small ground plane in spite of the difference of the impedance conditions. The small ground plane is here defined as a plane having a radius being less
10 than λ at the desired operating frequency by the antenna.

The conductive radiating structure 10 is to be connected to a feed line, which could be any type of transmission/feed line, at its second end 14. The feed line is connected to transceiver
15 circuits of a radio communication device.

The first end 12 of the conductive radiating structure 10 is connected to ground of the radio communication device. The distance between the first end 12 and the second end 14 along
20 the conductive radiating structure 10 is in the range of $\lambda/4 - \lambda$, where λ is the wavelength of the desired frequency in the frequency band(s) to be received/transmitted by the antenna. The conductive radiating structure can be tuned to its frequency by adjusting said distance between its the first and
25 second ends 12, 14, by cutting at the second end 14 of the conductive radiating structure 10.

The conductive radiating structure 10 is arranged on a ground plane means 20. The first end of the loop structure is
30 preferably galvanically connected to ground but can alternatively be capacitively connected to ground. If galvanically connected to ground said first end of the radiating structure can be provided with connection pins passing through holes in the ground plane means 20 acting as a
35 ground plane or through holes in a metallic sheet acting as a

+46 8 6609115

Ink. t. Patent och reg.verket

1995-10-04

14

Huvudfaxen Kassar

ground plane. The pins are then preferably soldered to the ground plane means 20 or the metallic sheet.

The ground plane means 20 includes a substrate with a

5 conductive portion of a proper size is sufficient for the antenna function, and the antenna device 1 can be mounted to a vehicle. However, if the antenna device 1 is mounted at a small height e.g. 0.5 mm above a vehicle roof or body, conductive portions of the vehicle are coupled, capacitively, to the

10 conductive portion of the ground plane means 20. In this case said conductive portions also act as ground plane. The radiation of the antenna is however dependent on the size of the ground plane.

15 The conductive radiating structure formed as an elongated open loop 10 is shown to be arranged orthogonal to the ground plane means 20. As mentioned above the first end of the conductive radiating structure formed as an elongated open loop is galvanically or capacitively coupled to the ground plane means

20 20. The second end 14 of the conductive radiating structure formed as an elongated open loop is electrically isolated from the ground plane means 20. A transmission line/feed line e.g. a coaxial cable 19 is with its electrical shielding connected to ground or directly to the first end of the conductive radiating

25 structure formed as an elongated open loop 10. A central conductor 15 in the coaxial cable 19 is connected to the second end 14 of the conductive radiating structure formed as an elongated open loop 10. Said second end being in thus embodiment a feed portion.

30 The conductive radiating structure formed as an elongated open loop 10 is preferably manufactured by stamping or cutting out the structure from a conductive plate e.g. metal plate. The width of the conductive radiating structure formed as an

35 elongated open loop in the plane of the radiating structure is

essentially larger than the thickness perpendicular to the plane of the structure. Said conductive radiating structure formed as an elongated open loop can be arranged on a carrier in the form of a dielectric substrate. Alternatively, said
5 radiating structure could be made out of an electrical conductor having for example a round, rectangular or triangular cross section. The structure could in a further alternative be formed on a dielectric carrier by printing or etching.

10 A surface defined by the conductive radiating structure formed as an elongated open loop 10 is preferably orthogonal to the ground plane means 20. However, said surface of the conductive radiating structure formed as an elongated open loop 10 can be arranged at an angle α with respect to said ground plane,
15 where said angle α is in the range of 30-150°. Said surface of the conductive radiating structure formed as an elongated open loop 10 is preferably a plane surface but can be curved or folded in a C-shaped or V-shaped manner respectively.

20 The direction of polarisation is orthogonal to the ground plane means 20. The conductive radiating structure formed as an elongated open loop 10 radiates the desired frequency in a omnidirectional pattern.

25 With reference to Figure 5, a fourth embodiment of an antenna device 1 according to the invention is shown. The antenna device is arranged for transmission/reception of RF waves in at least one frequency band, e.g. in the 900 MHz band.

30 The antenna device 1 is to be connected to a radio communication device (not shown) arranged to a vehicle. As shown in the figures, the antenna device 1 is arranged on a ground plane means 20, such as a vehicle body. This ground plane means 20 will act as a ground plane. The ground plane
35 means 20 can be replaced by a conductive ground plane of proper

+46 8 6609115

Ink. t. Pat. och reg.verket

16

1999 -10- 0 4

Huvudfoxen Kasson

size in a radio communication device, e.g. a PCB (printed circuit board).

5 The antenna device 1 comprises a conductive radiating structure 10 for transmission/reception of RF waves in said frequency band(s).

10 The conductive radiating structure 10, being in this embodiment essentially rectangular shaped, comprises a first end 12, a second end 14, a tuning/matching means 16 and an bridge connector 18. A second elongated open loop (or internal elongated open loop) in said structure 10 is defined by the path from the first end to the second end via the bridge connector 18. A first elongated open loop (or an external elongated open loop) is defined as a longest path from the first end to the second end in the conductive radiating structure 10. In figure 4 the tuning/matching means 16 is with a first side capacitively and inductively coupled to a second side of the bridge connector 18 and partly with a second side capacitively and inductively coupled to a common side of the rectangular shaped first and second elongated open loops located closest to the ground plane. Said bridge connector 18 having a first side capacitively and inductively coupled to a side of the first rectangular shaped elongated open loop located furthest away from the ground plane. The opening 17 of the first and second elongated open loop structures is in this embodiment located at a corner of the rectangle between the tuning/matching means 16 and the ground plane means 20. However, the opening 17 can be arranged somewhere along the common side of the first and second elongated open loops.

15
20
25
30

Due to the frequency dependence of the inductive coupling the second elongated open loop has a small influence to the lower frequency band but much higher to the higher frequency band.

Ink. t. Patent- och reg.verket

1999-10-04

17

Huvudfaxen Kassar

Thus a more efficient optimization is possible for two or multiband service.

5 In figure 5 the tuning/matching means 16 is with a first side capacitively and inductively coupled to a side of the rectangular shaped radiating structure 10 located perpendicular to the ground plane means 20. The tuning/matching means is introduced to optimize performance in the highest band only. In this embodiment said tuning/matching means can be seen as an
10 extra mono pole. Said bridge connector 18 having a first side capacitively and inductively coupled to a side of the first rectangular shaped elongated open loop located furthest away from the ground plane. Said bridge connection having parts of a second side capacitively and inductively coupled to an open
15 portion 17 of the common side of the rectangular shaped first and second elongated open loops located closest to the ground plane. The opening portion 17 of the first and second elongated open loops is in this embodiment located in a middle of the common side of said rectangular shaped loops being located
20 closest to the ground plane.

The conductive radiating structure formed as a first and second elongated open loops 10 is to be connected to a transmission/feed line. The transmission line/feed line that could be a coaxial cable 19 is with its central conductor 15
25 feeding the radiating structure at the second end being a feed portion. The transmission/feed line is connected to transceiver circuits of a radio communication device.

The first end 12 of conductive radiating structure 10 is
30 connected to ground. The distance between the first end 12 and the second end 14 along the second elongated open conductive radiating structure is in the range of $\lambda/4 - \lambda$, where λ is the wavelength of the desired frequency in the frequency band to be received/transmitted by the antenna. The first elongated open
35 loop can be tuned to its desired frequency by adjusting said

distance between the first and second ends 12, 14, by cutting at the second end 14 of the conductive radiating structure 10. The distance between the first end 12 and the second end 14 along the first elongated open loop is dependent on the choice of frequency band. If the second elongated loop is adjusted to operate at a frequency at 1800 MHz and the first elongated loop is adjusted to receive a frequency at 900 MHz the relation between the distance between the first 12 and second ends of the first and second elongated loop is about 2:1.

The conductive radiating structure 10 is arranged on a ground plane means 20. The first end of the radiating structure is preferably capacitively connected to ground but can alternatively be galvanically connected to ground. If galvanically connected to ground said first end of the radiating structure can be provided with connection pins passing through holes in the ground plane means 20 acting as a ground plane or through holes in a metallic sheet acting as a ground plane. The pins are then preferably soldered to the ground plane means 20 or the metallic sheet.

The ground plane means 20 with a conductive portion of a proper size is sufficient for the antenna function, and the antenna device 1 can be mounted to a vehicle. However, if the antenna device 1 is mounted at a small height e.g. 0.5 mm above a vehicle roof or body, conductive portions of the vehicle are coupled, preferably capacitively, to the ground plane means 20. In this case said conductive portions also act as ground plane. However, the radiation of the antenna is dependent on the size of the ground plane.

The conductive radiating structure 10 is shown to be arranged orthogonal to the ground plane means 20. As mentioned above the first end of the conductive radiating structure is galvanically or capacitively coupled to the ground plane means 20. The

+46 8 6609115

Ink. t. Patent- och reg.verket

1999 -10- 0 4

19

Huvudfoxen Kossan

second end of the conductive radiating structure is electrically isolated from the ground plane means 20. A transmission/feed line e.g. a coaxial cable 19 is with its electrical shielding connected to ground or directly to the first end of the radiating structure. A central conductor in the 19 cable is connected to the second end of the conductive radiating structure.

The conductive radiating structure 10 is preferably manufactured by stamping or cutting out the structure from a conductive plate e.g. metal plate. The width of the first and second elongated open loops in the conductive radiating structure 10 in the plane of the radiating structure is essentially larger than the thickness perpendicular to the plane of the structure. Said radiating structure can be arranged to a dielectric substrate by means of rivets, screws, glue, tape or other equivalent means. Alternatively, said radiating structure could be made out of a electrical conductor having for example a round, rectangular or triangular cross section. The structure could in a further alternative be formed on a dielectric carrier by printing or etching.

A surface defined by the conductive radiating structure is preferably orthogonal to the ground plane. However, said surface of the structure can be arranged at an angle α with respect to said ground plane, where said angle α is in the range of 30-150°. Said surface of the structure is preferably plane but can be curved or folded in a C-shaped or V-shaped manner respectively.

The direction of polarisation is orthogonal to the ground plane. The loop structure 10 radiates the desired frequency in a omnidirectional pattern.

+46 8 6609115

Ink...ent- och reg.verket

1999-10-04

20

Huvudfaxen Kassan

Figure 6 shows yet another embodiment where the feeding point is moved from the second end of the elongated open loop to a point near the first end 12 but still close to the ground plane means 20. This will change the impedance level but will

5 basically maintain the frequency dependence of the impedance.

The conductive radiating structure can be mounted on a substrate together with another antenna device, e.g. a GPS antenna forming an antenna assembly. Said antenna assembly can

10 be covered and protected by a housing. The substrate is preferably made of a dielectric material which could be provided with a conductive pattern connected to ground.

In the previous embodiments the antenna means has been provided

15 with a ground plane means 20. When mounted on a vehicle, this ground plane means 20 can be coupled to conductive portions of the vehicle galvanically and/or capacitively. Alternatively the ground plane means 20 can be omitted and the conductive portions of the vehicle act as ground plane means.

S. k. t. Patent- och reg.verket

1999-10- 0 4

21

Huvudfaxen Kassar

CLAIMS

1. An antenna means for transmitting and/or receiving RF signals in at least a first frequency band, comprising:

- a ground plane means (20) arranged to be connected to ground of a circuitry of a radio communication device,
- a conductive radiating structure (10) having a first end (12) and a second end (14),
- said conductive radiating structure (10) is arranged separated from the ground plane means (20), characterised in that
- said conductive radiating structure is formed as at least a first elongated open loop,
- said first end (12) is arranged to be connected to ground of said radio communication device, and
- a feed portion is arranged in vicinity of the first and second ends.

2. The antenna means according to claim 1, characterised in that said second end being a feed portion.

3. The antenna means according to claim 1 or 2, characterised in that said conductive radiating structure (10) having a total length of $\lambda/4$ - λ at a frequency in the frequency band to be received and/or transmitted by the antenna.

4. The antenna means according to any of the claims 1-3, characterised in that said conductive radiating structure (10) being a flexible film attached to a dielectric substrate.

+46 8 6609115

Ink. t. Patentreg.verket

1999-10-04

22

Huvudfaxen Kassan

5 5. The antenna means according to any of the claims 1-4, characterised in that said conductive radiating structure (10) exhibits at least a planar section, said planar section is forming an angle (α) with said ground plane means, where (α) is in the range of 30-150°.

6. The antenna means according to claim 5, characterised in that said surface of said conductive radiating structure (10) being curved or folded such as to include C-shapes or V-shapes.

10 7. The antenna means according to any of the preceding claims, characterised in that said conductive radiating structure (10) being meander shaped.

15 8. The antenna means according to any of the preceding claims, characterised in that it further comprises a tuning/matching means (16) for tuning/matching to one or multiple frequencies.

20 9. The antenna means according to claim 8, characterised in that said tuning/matching means (16) is an electrical conductor having a first end and a second end, where said first end being arranged to said at least one elongated open loop, said second end being a free end and at least a part of at least one side of said conductor is capacitively coupled to said at least one elongated open loop.

25 10. The antenna means according to claim 9, characterised in that said electrical conductor (16) being meander shaped.

30 11. The antenna means according to any of the preceding claims, characterised in that it further comprises at least one bridge connector (18) being an electrical conductor coupled with a first end and a second end each connected to different parts of said at least one elongated open loop.

+46 8 6609115

Patent- och reg.verket

23

1999-10-04

Huvudfoxen Kossan

12. The antenna means according to claim 11, characterised in that a side of said bridge connector (18) is capacitively and inductively coupled to a side of a first elongated open loop in said conductive radiating structure (10).

13. The antenna means according to claim 11 or 12, characterised in that said tuning/matching means (16) is arranged close to said bridge connector (18) for forming a capacitive and inductive coupling therebetween.

14. The antenna means according to claim 11-13, characterised in that said bridge connector (18) is meander shaped.

15. The antenna means according to any of the preceding claims, characterised in that the first end of the conductive radiating structure (10) is coupled to ground.

16. An antenna assembly including an antenna means (1) according to any preceding claim, wherein the assembly comprises at least one further antenna element for transmitting/receiving radio frequency signals, for instance, a GPS antenna.

+46 8 6609115

Ink. i. Patent- och reg.verket

1999-10-04

Huvudfaxen Kassan

24

ABSTRACT

5 The present invention relates to an antenna means for transmitting and/or receiving RF-signals in at least a first frequency band. The antenna means comprising a ground plane means (20) arranged to be connected to ground of a circuitry of a radio communication device, a conductive radiating structure (10) having a first end (12) and a second end (14), where said conductive radiating structure (10) being separated from the ground plane means (20). Said first end (12) being connected to ground and said second end (14) being a feed portion.

10

1/3

Ink t. Patent- och reg.verket

1999 -10- 0 4

Huvudfoxen Kassan

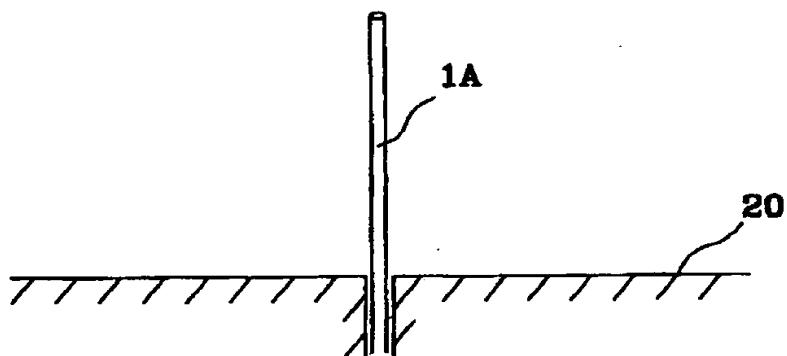


Fig. 1a

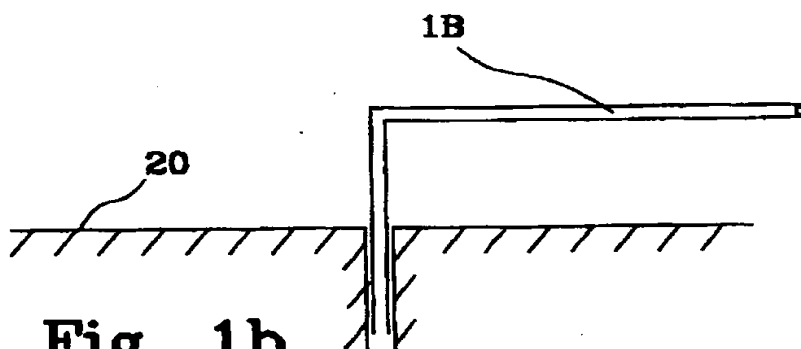


Fig. 1b

2/3

Svenskt Patent- och reg.verket

1999-10-04

Huvudfaxen Kassan

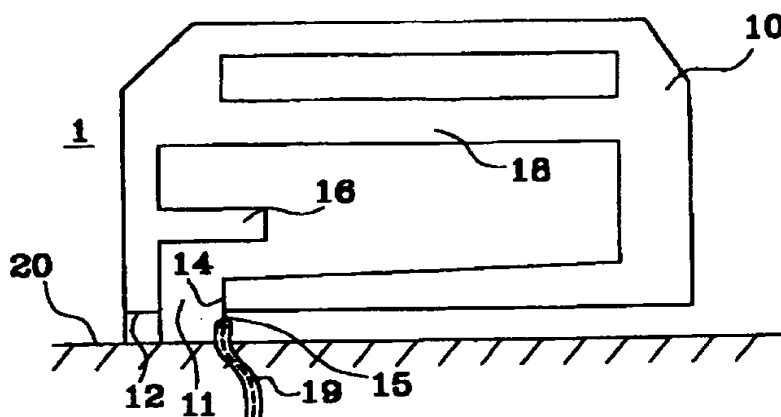


Fig. 2

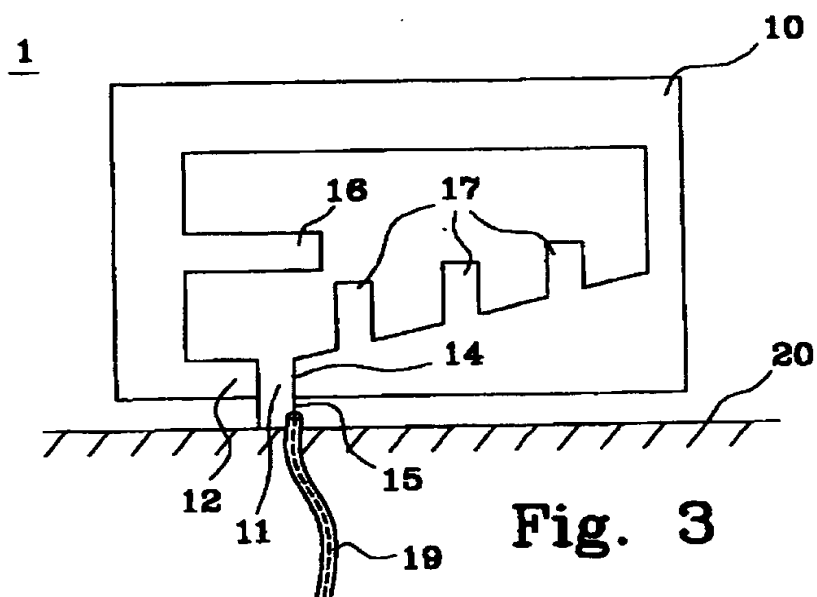


Fig. 3

Ink. t. Patent- och reg.verket

1999-10-04

Huvudfaxen Kassan

3/3

